




Bearing Driveshaft do Brasil

20 mm x 47 mm x 14 mm NTN 7204B angular contact ball bearings

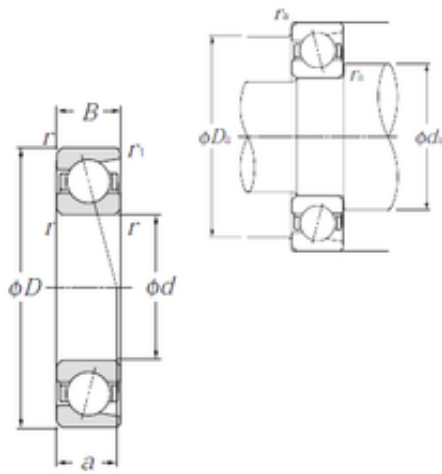

7204B Bearing 2D drawings and 3D CAD models

Bearing No. 7204B

Size	20x47x14 mm
Bore Diameter	20 mm
Outer Diameter	47 mm
Width	14 mm
d	20 mm
D	47 mm
B	14 mm
C	14 mm
Angle (°)	40 °
a	21,5 mm
r min.	1 mm
r1 min.	0,6 mm
da min.	25,5 mm
db min	24,5 mm
ra max.	1 mm
Weight	0,102 Kg
Basic dynamic load rating (C)	13,3 kN
Basic static load rating (C0)	7,7 kN
(Grease) Lubrication Speed	15 000 r/min
Contact angle	40 °
rs min	1 mm
r1s min	0.6 mm
Mass	0.1 kg
Dynamic load, C	13.3 kN
Static load, C0	7.7 kN



Bearing Driveshaft do Brasil

Fatigue limit load, Cu	0.35 kN
Nlim (oil)	20,000 rpm
Nlim (grease)	15,000 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	4.22 Hz
Characteristic outer ring frequency, BPF0	4.53 Hz
Characteristic inner ring frequency, BRFI	6.47 Hz
da min	25.5 mm
Da max	41.5 mm
Db max	42.5 mm
r1a max	0.6 mm
ra max	1 mm
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.105
EAN	4547359437737
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No



Bearing Driveshaft do Brasil

Snap Ring	No
Cage Material	Steel
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	7204B
Weight / LBS	0.232
Width	0.551 Inch 14 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
Bore	0.787 Inch 20 Millimeter
bore diameter:	20 mm
radial static load capacity:	7700 N
outside diameter:	47 mm
operating temperature range:	-40 to 120 ° C
overall width:	14 mm
cage material:	Steel
contact angle:	40 °
outer ring width:	14 mm



Bearing Driveshaft do Brasil

row type & fill slot:	Single-Row Non-Fill Slot
maximum rpm:	20000 rpm
internal clearance:	C0
finish/coating:	Uncoated
bore type:	Round
precision rating:	ISO Class 0
closure type:	Open
fillet radius:	1 mm
snap ring included:	Without Snap Ring
series:	72B
bearing material:	High Carbon Chrome Steel
weight:	0.105 kg
radial dynamic load capacity:	13300 N
manufacturer product page:	Click here