




## Bearing Driveshaft do Brasil

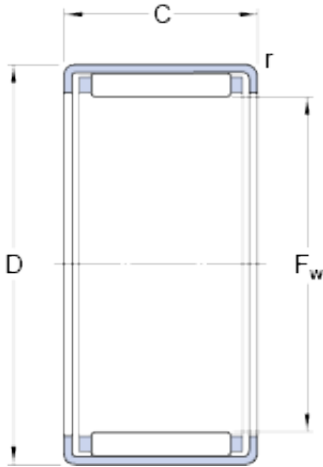

HK 1412 Bearing 2D drawings and 3D CAD models

### SKF HK 1412 cylindrical roller bearings

Bearing No. HK 1412

Size	20x14x12 mm
Bore Diameter	20 mm
Outer Diameter	14 mm
Width	12 mm
$F_w$	14 mm
D	20 mm
C	12 mm
r - min.	0.8 mm
Basic dynamic load rating - C	6.8 kN
Basic static load rating - $C_0$	8.6 kN
Fatigue load limit - $P_u$	0.98 kN
Reference speed	15000 r/min
Limiting speed	17000 r/min
Mass bearing	0.0105 kg
Inner ring IR series	IR 10x14x13
Radial shaft seal with a low cross-sectional height, single lip	G 14x20x3
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.014
EAN	7316577010315
Product Group	B04144
bore diameter:	14 mm



## Bearing Driveshaft do Brasil

static load capacity:	8.65 kN
outside diameter:	20 mm
bearing material:	Steel
overall width:	12 mm
maximum rpm:	17000 RPM
drawn cup type:	Open Ends
precision rating:	Not Rated
closure type:	Open
series:	HK
number of rows:	One
lubrication hole type:	No Hole
operating temperature range:	Maximum of +285 ° F
compatible inner ring:	IR 10x14x13
dynamic load capacity:	6.82 kN
$F_w$	14 mm
r min.	0.8 mm
Basic dynamic load rating C	6.82 kN
Basic static load rating $C_0$	8.65 kN
Fatigue load limit $P_u$	0.98 kN
Designation bearing	HK 1412
Radial shaft seal with a low cross-sectional height, double lip	SD 14x20x3