




Bearing Driveshaft do Brasil

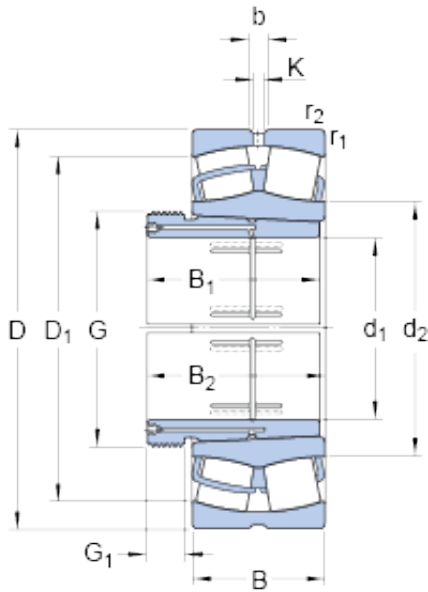

24072 CCK30/W33 + AOH 24072 Bearing 2D drawings and 3D CAD models

SKF 24072 CCK30/W33 + AOH 24072 tapered roller bearings

Bearing No. 24072 CCK30/W33 + AOH 24072

Size	540x340x180 mm
Bore Diameter	540 mm
Outer Diameter	340 mm
Width	180 mm
d_1	340 mm
D	540 mm
B	180 mm
d_2	397 mm
D_1	474 mm
B_1	206 mm
b	16.7 mm
K	9 mm
$r_{1,2}$ - min.	5 mm
G	Tr 380x5
G_1	380 mm
d_a - min.	369 mm
D_a - max.	522 mm
r_a - max.	4 mm
Basic dynamic load rating - C	3705 kN
Basic static load rating - C_0	6550 kN
Fatigue load limit - P_u	490 kN
Reference speed	700 r/min
Limiting speed	1000 r/min
Calculation factor - e	0.31



Bearing Driveshaft do Brasil

Calculation factor - Y_1	2.2
Calculation factor - Y_2	3.3
d_1	340 mm
d_2	397 mm
D_1	474 mm
B_1	206 mm
B_2	226 mm
$r_{1,2}$ min.	5 mm
G_1	26 mm
d_a min.	369 mm
D_a max.	522 mm
r_a max.	4 mm
Basic dynamic load rating C	3705 kN
Basic static load rating C_0	6550 kN
Fatigue load limit P_u	490 kN
Calculation factor e	0.31
Calculation factor Y_1	2.2
Calculation factor Y_2	3.3
Calculation factor Y_0	2.2
Mass bearing + sleeve	165 kg